

Leica ASP300 S

Superior Specimen Quality, Every Time!
Automated Vacuum Tissue Processor



The Leica ASP300 set a new standard for specimen quality and reliability in automated tissue processing. Ongoing research and development work with enhanced processes and system components now reflects the latest in state-of-the-art technology:

The New Leica ASP300 S

The Leica ASP300 S, designed for routine clinical and research histopathology, is an innovative, smart processor for paraffin infiltration of tissue. Proven, enhanced technology and Leica's intuitive user interface are hallmarks of the ASP300 S. Straightforward routine user operations and a variety of 'Smart' features, such as Leica's Reagent Management System (RMS) and quick start for commonly used programs, improve specimen quality and laboratory economy. Once again the Leica ASP300 S sets a new standard. Leica Biosystems' application of state-of-the-art engineering and manufacturing technology, combined with top quality components, continues to bring superior specimen processing to your laboratory.





Select your favorite programs with ease

Frequently used programs can be defined as 'Favorites'. A single touch of the touchscreen starts a favorite program, using the 'Smart Start' function. Smart Start automates the start of most common programs and allows the technician to perform scheduling functions, such as defining a delayed end time by extending certain program steps. Smart Start reduces user intervention, which improves operating reliability. Another feature: rapid protocols for biopsies are pre-stored to shorten turnaround time and eliminate the need to level workflow in the laboratory.

High-quality specimens, every time

The Leica ASP300 S is designed to reliably deliver high-quality specimens – every day of the year and for many years to come. Superior process control, functional design, and precise temperature control are just a few of the features that ensure optimum specimen quality.

The Leica ASP300 S is a smart investment for the efficiency of your laboratory.

 **Routine Overnight**
Finish 07:45 **1**

 **Small Biopsies**
Finish ASAP **3**

 **Urgent**
Finish ASAP **5**

 **Routine Overnight RMS**
Finish ASAP **2**

 **Routine Overnight**
Finish 07:45 Mon **1**



Magnetic stirrer



Sensor



Full process control

The Leica ASP300 S and the technician work together as a team. The technician has the freedom to set all critical program parameters to achieve the perfect process and can further control tissue infiltration by modifying the pressure levels inside the retort, as needed. Minimal reagent carryover – achieved by the software-controlled 3-step draining process of the retort and by the retort design itself – also helps achieve superior specimen quality every time.

Real-time process data about key instrument settings, such as current filling status, temperature and pressure inside the retort, paraffin bath temperature, as well as status of the paraffin bath and retort heating systems, is always available.

Comprehensive specimen protection

A comprehensive, intelligent safety system reliably protects the specimens. The system even applies the best contingency plan for successful tissue processing should anything unexpected occur; for example, a power failure or operating errors such as missing or under-filled reagent bottles. The system's most important objective is always protection against possible loss of a specimen.

Easy-to-use Software

The Leica ASP300 S software is easy to learn and features an intelligent yet easy-to-operate user interface. Available in many different languages with intuitive graphics, Leica's ASP300 S software, operated via a solvent-resistant color touchscreen, guides the technician safely and smoothly through the tissue processing program.

Built-in quality assurance

Leica's enhanced Reagent Management System and printable data tracking assists the laboratory to comply with accrediting agency regulations and QC requirements. All important data from each process step is automatically logged into a data file and can be downloaded to a disk or printed. The two-level password security system ensures that only authorized personnel can operate the Leica ASP300 S. The software features context-sensitive help to answer common questions.

Enhanced Reagent Management System

Leica's comprehensive Reagent Management System (RMS) allows critical data to be assessed at a glance. The RMS ensures that all reagents and paraffin are automatically used in the order of cleanliness. The user-programmable warning thresholds automatically indicate, in a timely manner, when reagents need to be changed. To fill or drain the color-coded reagent bottles, the technician simply selects the desired bottle in the menu, and the RMS automatically takes care of the fill/drain process. The RMS ensures high-quality specimens and simultaneously reduces the cost of instrument operation through economic reagent usage. For documentation and evaluation purposes, reagent and specimen data can be exported and saved into word processing or spreadsheet programs and printed.

NEW! Microwaveable tissue cassette baskets

Leica's new plastic cassette baskets are suitable for microwave-assisted specimen fixation. The convenient basket hook transports three baskets at a time.

Leica RemoteCare™


NEW! Real-time application and service support

Tissue Processor downtime dramatically impacts the efficiency of your laboratory and the quality of tissues. To help maximize uptime and the performance of your most critical process step, tissue processing, Leica Biosystems now takes service and application support to the next level. The Leica ASP300 S offers Leica RemoteCare, a patented, secure software program that provides real-time application and service support. The possibility to diagnose system problems remotely with reasonable accuracy helps customers prevent issues that can cause downtime and specimen loss.

RemoteCare monitors the ASP300 S in real-time, captures instrument data, and proactively resolves potential problems. This is accomplished through an internet connection from the ASP300 S's on-board computer (direct or proxy server connection to the ASP300 S is required). Privacy is always protected by the RemoteCare service. Access to any customer data is blocked. RemoteCare service can be installed during the installation of the ASP300 S or during a routine engineer visit. Also, you can upgrade your ASP300 S to RemoteCare at anytime.



| Reagent Status | | | | | | | | Friday, 18 August 2006 11:11:55 AM | |
|----------------|------------------|----------------------|----------------------|--------------------|----------------------|----------------------|--------------------|------------------------------------|--|
| Status | Reagent | Blocks Since Changed | Cycles Since Changed | Days Since Changed | Blocks Since Cleaned | Cycles Since Cleaned | Days Since Cleaned | Status | |
| 1 | Paraffin | 0 | 0 | 0226 | | | | Full | |
| 2 | Ethanol 70% | 0 | 0 | 0226 | | | | Full | |
| 3 | Ethanol 90% | 0 | 0 | 0226 | | | | Full | |
| 4 | Ethanol Absolute | 0 | 0 | 0226 | | | | Full | |
| 5 | Ethanol Absolute | 0 | 0 | 0226 | | | | Full | |
| 6 | Ethanol Absolute | 0 | 0 | 0226 | | | | Full | |
| 7 | Ethanol Absolute | 0 | 0 | 0226 | | | | Full | |
| 8 | Xylene | 0 | 0 | 0226 | | | | Full | |
| 9 | Xylene | 0 | 0 | 0226 | | | | Full | |
| 10 | Xylene | 0 | 0 | 0226 | | | | Full | |
| 11 | Cleaning Xylene | 0 | 0 | 0226 | | | | Full | |
| 12 | Cleaning Ethanol | 0 | 0 | 0226 | | | | Full | |
| 13 | Cleaning Water | 0 | 0 | 0226 | | | | Full | |
| 13 Ext | | | | | | | | Full | |
| Wax(1) | Hotmax | 0 | 0 | 0226 | 0 | 0 | 0226 | Full | |
| Wax(2) | Hotmax | 0 | 0 | 0226 | 0 | 0 | 0226 | Full | |
| Wax(3) | Hotmax | 0 | 0 | 0226 | 0 | 0 | 0226 | Full | |

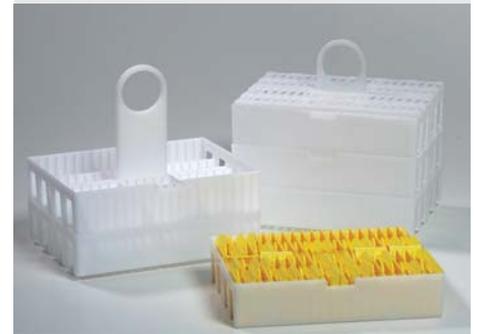

Built to Last

"Made in Germany" using the finest durable materials and components, the Leica ASP300 S is built to last and represents state-of-the-art engineering and production technology. Reliability and long-term cost-savings make the Leica ASP300 S the new standard in automated tissue processing.



1 Comprehensive monitoring and documentation

The new Leica ASP300 S is equipped with a printer port that documents all program runs and settings for subsequent evaluation and/or printing. This comprehensive documentation system is capable of creating records to comply with all current quality control standards.

2 Active paraffin cleaning cycle

A simple touch of the screen reduces the concentration of solvent contaminants in the paraffin. An active extraction process ensures efficient paraffin cleaning, which extends paraffin life, improves tissue quality, and reduces operating costs.

3 Fully enclosed fume system

A smart internal air handling system contains the contaminated air inside the instrument. All fumes are condensed and collected in a designated container. An activated, long-life carbon filter then absorbs any remaining fumes. This is one of Leica's many safety enhancements for a hazard-free environment.

4 Improved reagent bottle and cabinet design

Leica's unique reagent bottle design reliably prevents reagent carry-over. The cabinet is designed to offset any fluctuations in the sizes of the reagent bottles so that bottle installation and removal can always proceed smoothly, without risk. An easily accessible drip tray catches any reagent spills and protects the laboratory environment.

5 Ergonomic design provides easy accessibility

Ample surface space is available on the paraffin bath and the retort lid to facilitate the exchange of paraffin or cassette baskets. The retort lid's safety lock is safely opened and closed with one hand. All user-relevant functions, work areas, and connections are easily accessible. These include the hose connections for remote fill and drain of reagents and/or paraffin, the printer port, the serial port, and the connectors for the local and external remote alarm.

6 Remote Fill and Drain enhances user safety

Leica's remote Fill and Drain provides contact-free reagent handling for enhanced user safety. The external hose system conveniently drains reagents and paraffin. Filling the reagent bottles is safe and easy. The remote fill system ensures that reagent bottles are always filled to the correct fluid level with no under-filled bottles. The result: maximum user protection and tissue quality with minimum operating errors.

Leica ASP300 S – Technical Specifications

PROCESSING RETORT

| | |
|---|--|
| Maximum capacity - metal basket | 300 cassettes |
| Maximum capacity - microwaveable plastic basket | 252 cassettes |
| Retort material: | stainless steel |
| Level sensing: | optical sensors |
| Processing retort volume: | 4.3 liters |
| Paraffin temperature range: | 40–65 °C |
| Reagent temperature range: | ambient, 30–55 °C |
| Temperature accuracy | +/- 1 °C |
| Retort draining: | selectable (80, 120, 140 seconds), 3 steps |
| Vacuum & pressure options | 4 (V/P, V, P, Ambient) |
| Vacuum | - 70 kPa (g) |
| Pressure | +35 kPa (g) |
| Recirculation (pump in/out) | |
| – Time before first cycle | 12 minutes |
| – Time between cycles | 20 minutes |
| Incubation time | 0–99 hours, 59 minutes |
| Delayed end-time | programmable, up to one week |

PARAFFIN BATHS

| | |
|-------------------------------|-------------------------------------|
| Number of paraffin baths | 3, connected directly to the retort |
| Paraffin bath volume | 4.3 liters each |
| Average paraffin melting time | approx. 10 hours |

REAGENT BOTTLES

| | |
|---------------------------|--------------------|
| Number of reagent bottles | 10 |
| Reagent bottle volume | 4.3 liters each |
| Clean cycle bottles | 3, plus 1 external |

OTHERS

| | |
|--------------------------------|--------------------------------------|
| Display | Color touchscreen, solvent-resistant |
| Reagent Management System | • |
| Remote fill and drain system | • |
| Remote paraffin drain system | • |
| Reagent drip tray | • |
| 3.5" disc drive | • |
| Two external alarm connections | • |
| Parallel printer port | • |
| Serial port | • |
| Approvals | |

The Leica ASP300 S has been designed and manufactured in compliance with, CSA-us, c-CSA and IEC requirements.

DIMENSIONS & WEIGHT

| | |
|--------------------------------|---|
| Overall dimensions (D x W x H) | 68 x 59 x 132 cm (27 x 24 x 52 inches) |
| Weight (instrument only) | 140 kg (308.7 lbs) |

Technical specifications subject to change. Wide range of accessories on request.

State-of-the-art development, manufacturing and quality control procedures – certified under DIN EN ISO 9001 – ensure highest quality and reliability.

Key Features

- Easy-to-learn and operate user interface with a solvent-resistant color touchscreen
- Simplified software with context-sensitive online help feature
- RemoteCare™ for real-time application and service support
- Comprehensive safety system with innovative reagent compatibility check
- Instrument performance control
- Remote Fill and Drain feature
- Enhanced Reagent Management System (RMS)
- Precise temperature control and reagent agitation for short protocols
- 4 user-defined cleaning programs
- Active paraffin cleaning program
- Two-level password security
- Comprehensive documentation options
- Durable construction, which incorporates leading-edge technology





TOTAL TISSUE PROCESSING SOLUTIONS

Efficiently prepare and process tissue for high-quality Routine, Special and IHC/ISH staining.

Leica CEREBRO and Specimen ID

Clearly label cassettes and slides with Leica's advanced printers then track specimens, protect patients and monitor workflow throughout your laboratory with the Leica CEREBRO sample tracking system.

Cassettes

Get the best results with Leica cassettes including the ActivFlo™ range for maximum reagent exchange.

Fixatives and Processing Reagents

Choose from a range of traditional and innovative fixatives, alcohols and other processing reagents.

Paraffin wax

Leica Biosystems offers a wide range of high-quality paraffin waxes so you can find the formula that is just right for you.

Embedding, Sectioning and Staining

Maintain quality and efficiency with Leica's range of histology instruments and associated reagents and consumables.

LEICA BIOSYSTEMS

Leica Biosystems is a global leader in workflow solutions bringing histopathology laboratories and researchers the highest quality, most comprehensive product range in anatomical pathology. With complete histology systems featuring innovative automation, Novocastra™ reagents and Surgipath® consumables, Leica Biosystems offers the ideal product for each histology step and high-productivity workflow solutions for the entire laboratory.

Leica Biosystems – an international company with a strong network of worldwide customer services:

North America Sales and Customer Support

| | |
|---------------|--------------|
| North America | 800 248 0123 |
|---------------|--------------|

Asia/Pacific Sales and Customer Support

| | |
|-------------|-----------------|
| Australia | 1800 625 286 |
| China | +85 2 2564 6699 |
| Japan | +81 3 5421 2804 |
| South Korea | +82 2 514 65 43 |
| New Zealand | 0800 400 589 |
| Singapore | +65 6779 7823 |

Europe Sales and Customer Support

For detailed contact information about European sales offices or distributors please visit our website.

Leica Biosystems brings together products, quality and support. Offering a complete solution that helps you advance workflows, enhance diagnostic clarity and deliver what really matters – better patient care.

